

## 4K HDTVI to HDMI Converter with loop out

### **AD001TVI-4K** 4K HDTVI to HDMI Converter with loop out

With AD001TVI-4K, live video from 4K TVI camera can be simultaneously displayed on a 4K or 1080P high resolution HDMI monitor for public view.

Besides to HDMI output, AD001TVI also offers HD loop out with UTC function to DVR or next AD001TVI-4K to build configuration of one in to multiple output.

For its solid metal chassis and compact size, AD001TVI-4K fits any installation circumstances.



### Features:


- Converts 4K HD-TVI signal to HDMI signal.
- BNC Input support: 1080p/4MP/5MP up to 4K (8 MP)
- Support HDMI output up to 4K @ 30HZ
- Support BNC video loop out.
- Support UTC.
- Built in OSD function.
- HDMI and DVI compliant. (support DVI monitor by a HDMI to DVI adaptor)

### Installation:

(1)



(2)

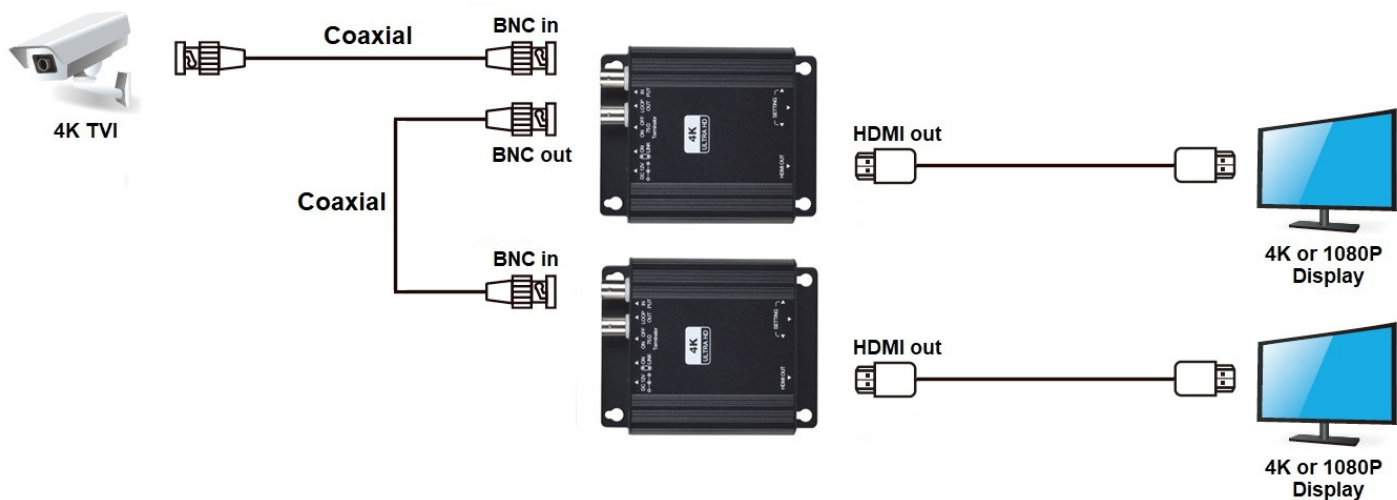

**Note:**

If you are using the BNC loop output (optional), this 75Ω Terminator should be set to “ON”.

If you are only using the HDMI output (without the BNC loop), 75Ω Terminator should be set to “OFF”.

**LED Indication:**

Green              Power ON

Blue                Receiving input signals.

**Specifications:**

<b>ITEM NO</b>	AD001UHD4
Video Input	HD-TVI 1080p @ 25/30 FPS 4 MP 2560 x 1440p @25/30 FPS 5 MP 2592 x 1944p @20 FPS 4K (8 MP) 3840 x 2160 @ 15 FPS
Video Output	HDMI 1080p@60Hz 4K@30Hz
Input Connector	BNC
Output Connector	HDMI Type-A,BNC
75Ω Terminator	75Ω Terminator x 1
Power Supply	12V 1A
Power Consumption	300mA
Temperature	Operation: 0 to 70℃, Storage: -40 to 125℃, Humidity: up to 90%
Dimension (mm)	110.5*88*30
Weight (g)	236

RoHS   

v. 1901