



# CSS-V25

## Touch Screen Face Recognition

### Features:

- Compact Design
- Snapshot Image Log
- Dual Camera Fast Recognition
- 10,000 User Live Face Detection
- User Friendly 4.3" Touch Screen
- Support Time Server Synchronization
- PUSH methodology for real time LOGs data
- Built-In Web Server Easy for Browser Management
- Access Control and Time & Attendance Two in One



# Specifications

GENERAL DATA	
Software Application	SoMac/ Browser
Processor	ARM based 32 bits
Verification Mode	FACE/ Pincode/ Card/ Fingerprint
Proximity	EM/ Mifare/ Desfire/ NFC & BLE
Face Capacity	10,000
Fingerprint Capacity	S: 9,590
Card Capacity	20,000
Max. User Capacity	20,000
Access Log	100,000
System Log	10,000
Snapshot Log	5,000 Images
Web Base Management	Yes
PUSH methodology for real time log	Yes
Network IP Mode	Static IP/Auto IP(DHCP Client)
1:N Identification Speed	< 0.5 second
Time Sets/ Time Zones/ Group	255/120/255 SET
Holiday Set	100
Inputs	3 inputs, Exit Button/Door Sensor/Fire Alarm
Built-in relay	1 relay (COM/NO/NC)for door lock 1 relay (COM/NO/NC)for Alarm
Tamper	Yes
Live Face Detection	Yes
Face Scan Distance	30cm - 120cm

COMMUNICATION	
TCP/IP	Yes
RS485	Yes
Wiegand	1 channel IN or OUT
USB	USB 2.0 host

INDICATION DATA & USER INTERFACE	
Audible Speaker	16 bits mono
LED	Multi-Color
LCD	4.3 inches touch
Capacitive Touch Keys	4

ELECTRICAL DATA & CONDITIONS	
Operation Voltage	12V DC/ 1.5A
Operation Temperature	0°C - 50°C
Operation Humidity	10% - 80%RH
POE (Optional: require CSS-A11)	<ul style="list-style-type: none"> <li>PoE Standard: IEEE802.3af (15.4W)</li> </ul>

PHYSICAL DATA	
Dimensions	122.5 x 185 x 89 mm
Weight	590 g
Installation	Indoor

INTERNATIONAL STANDARDS & WARRANTY	
CE, FCC, ROHS	Yes
Warranty	1 Year
Optional Accessories	BF-50/CSS-A10/CSS-A11(POE)

## Structure




### Software

- Access control
- Time attendance
- Real time monitor
- Daily temperature check



Alerts for abnormal temperature

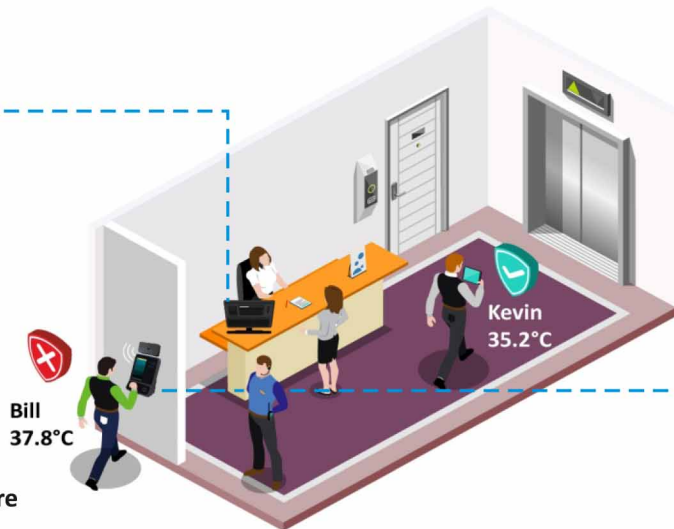

## Ordering information

