


Model: ON-102T/R

2 Channel Coax Video Multiplexer

1. Solution and picture

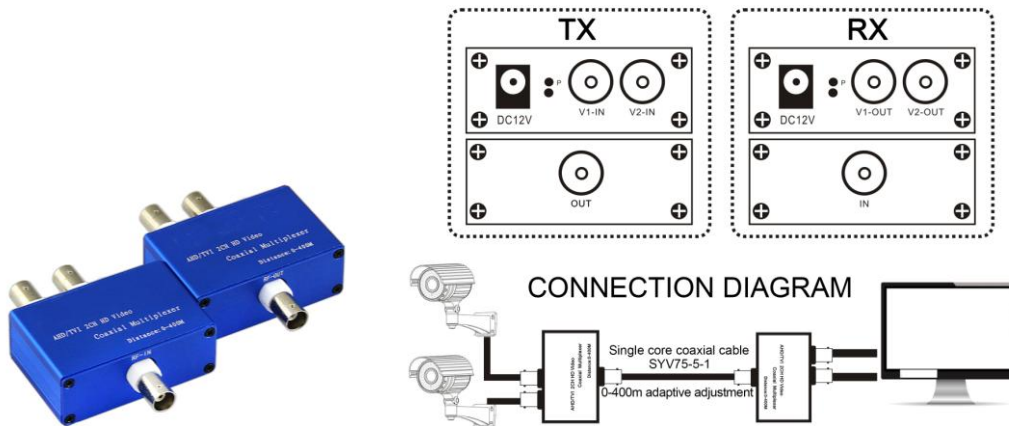

Warning: Need to use single core coax cable to ensure the transmission distance

2. Overview

It supports 2 channel video signals in one coaxial cable by way of Frequency Division Multiplexing, with all data transmission real-time and all images high-definition and non-delay. It is suitable for improvement of old projects and building under new projects.

3. Feature

1. it's designed according to projects with minimum installation volume requirement.
2. 2-CH video in one coaxial cable transmission.
3. FDM technology is easy for multi-channel signals transmission only in one coaxial cable without any delay and interference.
4. Perfect support coaxial video line, 75-3, 75-5, RG59 wire, etc.

4. Technical Parameters

Item name	2 channel coaxial video multiplexer
Model	ON-102T/R
Compatible mode	AHD1080P/TVI 3MP/CVI 1080P/CVBS
Interface	BNC port
Power supply input	DC 12V/1-2A
Transmission distance	0-400M adaptive
Operating temperature	-30°C-50°C
Shell material	High quality aluminum alloy materials
Product weight	67.5g/pc
Product size	64*43*23mm/pc