




## Model No.: **ON-L0C-2M** 2MP HD Warm Light Dome Camera

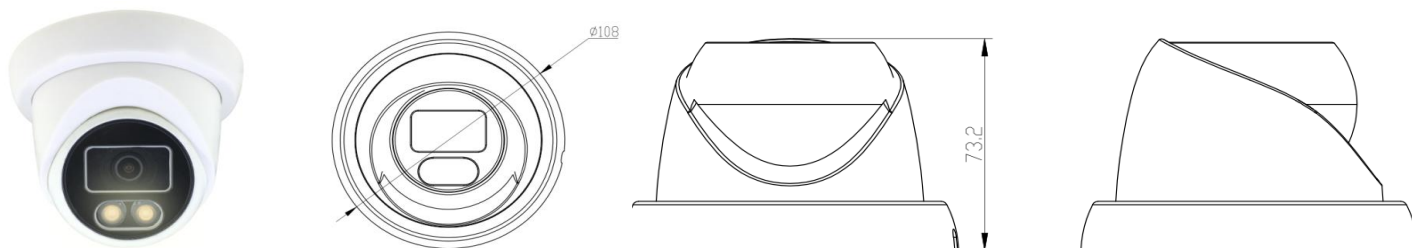

### Product Features

- 2MP HD Analog Out put( AHD/TVI/CVI )
- 1/2.9” High-Performance Progressive Scan COMS
- No Delay, Lossless, Long Distance transmission Up to 400 meters
- Support 3.6mm Lens
- Support DNR /WDR
- Support warm light day night full color
- Support Smart LED ,automatic adjust the brightness
- Support OSD Menu/DIP Switch /circulation button switch(Optional)
- Applicable to the Financial Departments, Telecommunications, Government, schools, airports, factory, Hotels , Museum, Public transportation and Other places.

Parameter Classification	Parameter Name	Parameter Value
Camera	Image Sensor	1/2.9” 2MP Progressive Scan COMS V30H+SC2237
	Resolution	1920*1080
	Image System	PAL/NTSC
	Minimum Illumination	3 Lux @ (F2.0, AGC ON)
	Electronic shutter	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
	Lens	3.6mm
	LEDs	2 PCS 3500K soft warm light
	SNR	>52dB (AGC off)
	Full color distance	15m
	Video Frame Rate	1080P@25fps, 1080P@30fps
	Video Output	TVI/AHD/CVI/CVBS

Menu	D&N	Support Color/ BW
	DNR	Support 2D 3D NR
	WDR	DWDR
	Smart LED	Support Auto/Manual Model、 1-10 level adjust
	White Balance	ATW / MWB/GRAY WORLD
	BLC	Support
	Image set	contrast、 sharpness、 saturate、 3DNR、 2DNR、 DWDR
	Language	English, Chinese
General	Power Supply	12VDC $\pm$ 10 %;
	Operating Conditions	(-20° C to 50° C), Humidity 90% or less (non-condensing)
	Protection level	IP66
	Power Consumption	Max. 3W (Max.3W with IR cut filter on)
	Dimensions	73.2mm*108mm