




Model: ON-IPTZB555G-4X 5MP 4X H265/H264 IR Bullet IP PTZ Camera

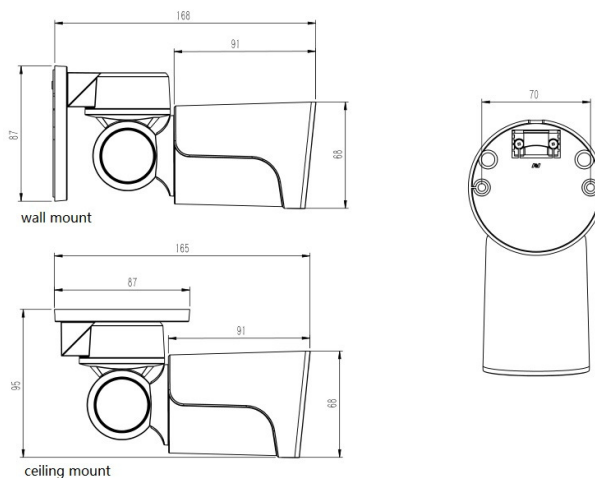

Features:

- ❖ 1/3" UHD CMOS sensor
- ❖ Solution: MC316DM+IMX335
- ❖ Max. 5MP resolution 2592 x 1944 output
- ❖ low illumination 0.1Lux
- ❖ Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- ❖ D-WDR, Motion Detection, Privacy Mask, Mirror, Flip
- ❖ RTSP and Onvif 2.6 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ Optional customization Lens/Audio/POE, etc.
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 6 pcs SMD Array IR Leds, IR distance 20-30 meters
- ❖ Network PTZ control , 4 times optical zoom
- ❖ HD 2.8 – 12 mm motorized lens

Technical Specifications:

Model	ON-IPTZB555G-4X
Camera	
Image Sensor	1/3" CMOS SONY IMX335 + MC316DM
Effective Pixels	5 megapixels
Electronic Shutter	AUTO
Min. Illumination	0.1Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
AGC/BLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror, Flip
Encode	
Video Standard	H.265/H.264
Video Resolution	Main Stream: 15fps@5MP(2592x1944),25fps@4MP(2592x1520),25fps@3MP/1080P/720P Sub Stream: VGA(640x480)/360P/QVGA@25fps, etc.
Video Bitrates	32Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
OSD Overlay	Title and Time overlay
IR Led	
IR Led	6 pcs SMD array IR Led
IR Distance	20-30 M
Lens	
Focal length	2.8 -12 mm motorized lens
Zoom	4x optical zoom
Optional Function	
POE, Audio, etc.	
PTZ	
Pan/Tilt Range	Pan: 0° ~ 180°; Tilt: 0° ~ 60°
Preset Point	1
Manual Control Speed	Pan: 0.5° ~20° /s; Tilt: 0.5° ~10° /s
Guard Position	Support
Power-off Recovery	Support
Network Services	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, etc.
Media	CMS, Android, IOS
ONVIF	2.6 compatible
General	
Network Port	1-RJ45, 100Mbps, POE : Internal type
Power Supply	12 VDC ± 10%
Power Consumption	< 10 W
Operating Temp.	-20°C-(+60)°C, 10%-90%RH