



ANTI-CORROSION IP PTZ CAMERA

ON-KX930-30X



Feature

- Anti-corrosion standard: NEMA-4X
- Temperature range -20°C ~ 60°C or -40°C ~ 50°C
- IP68 & IP69K
- Stainless steel 316L
- 30X optical zoom
- ROI (Region of Interest) & smart stream function
- Support privacy zone mask x 6 areas
- Support auto tracking
- DIS (digital image stabilizer) function
- Point-to-go for easy PTZ control (patrol group)
- Support cruise x 8 groups & 256 preset points
- POE support (60W compliant)
- ONVIF compliant
- APP push video
- Built-in Micro SD card for option
- Made in Taiwan

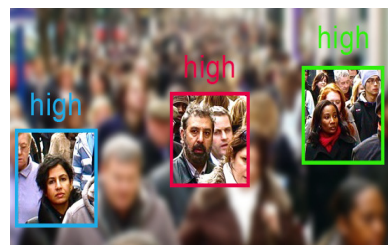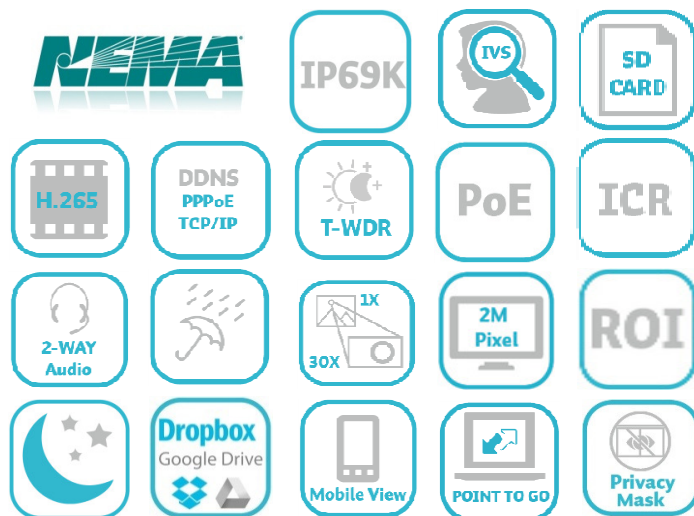


Region of Interest for 3



Solution for harsh area: on vessels at sea, ports and piers, bridges, exposed beachside, clean room or car parks

StarLight Sony Sensor

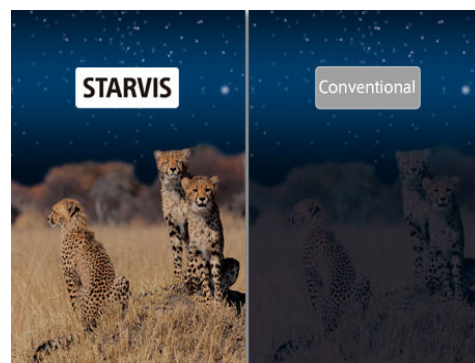

Excellent low light (STARVIS)

ON-KX930-30X

Server	Compression	H.265 / H.264 / MJPEG, 3 Streams
	Resolution	1920x1080@30fps, 1280x720@30fps, 640x480@30fps, 640x360@30fps, 320x240@30fps, 176x144@30fps
	Traffic Control	32K ~ 8Mbps
	Max. Frame Rate	(30fps)1920x1080
	Safety	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
	Protocols	IPv6, IPv4, HTTP, HTTPS, SNMP, SSL, TLS, DNS, ICMP, IGMP, ARP, SNTP, QoS/DSCP, IEEE 802.1X, RTSP/RTP/RTCP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour, Google Drive, Dropbox, ONVIF Profile S
	Number of User	Max. 10 connections
	Alerting	SMTP / FTP / Samba / SD card / I/O / Google Drive / Dropbox
	Pre / Post Alarm	Pre(0,1,2,3,4,5) / Post(0,1,2,3,4,5,10)seconds
	Release for Alarm	Motion Detection / I/O / Tampering Detection / Sound Detection
Network Camera	Sensor	1/2.8" Sony Exmor-R CMOS Sensor
	Optical Lens	30X optical zoom lens 4.7-141mm / F1.5 - F4.0
	Shutter Time	Outdoor / Indoor / 1/30, 1/50, 1/60, 1/100, 1/125, 1/250, 1/500, 1/1000, 1/5000, 1/10000
	Min Illum	0.005Lux(Color), 0.001Lux(B/W)
	View Angle	3.9°~60.0°(H) / 1.8°~34.0°(V)
	Pan / Tilt Range	Pan: 360° / Tilt: 0°~90° auto flip
	Manual Control Speed	Pan: 0.39°~85.91°/s, Tilt: 0.2°~42.96°/s
	Preset(Patrol) Speed	400°/s
	Preset Accuracy	<±0.15°
	Preset Points	256
	Preset Focus Mode	Auto / Manual
	Patrol	8 groups with 24 point
	Auto Pan	Yes
	Auto Recovery	Pending Time, Action
	Cruise	Yes, 8 groups
	Home Position	Yes
	Point To Go	Yes
	Day / Night	Auto / Light sensor mode / Color mode(Day) / B/W mode(Night) / Times mode
Audio	Intelligent Video	ROI / Smart Stream / DIS / D-WDR / Privacy Mask / Motion Detection / Tampering Detection / Sound Detection / 3D-De Noise Reduction / Anti-fog / Video Orientation / Cruise / Point-To-Go / Diagonal Movement / Present Point (Patrol Group), Auto Tracking
	Audio Compression	G.711(64Kbps) / G.726(32Kbps) / G.726(24Kbps)
	Adjust Volume	Mic-in / Audio-out web adjustable
	Audio In	3.5mm stereo jack, support 2 way
Terminal	Audio Out	3.5mm stereo jack, support 2 way
	Network Interface	Ethernet (10Base-T/100Base-Tx) / PoE
	Video Interface	--
	External Port	DI x 4 / DO x 2
General	SD Card	Internal SD Card Slot support up to 256G, industrial SD card suggest (Recording trigger for schedule, Motion detection, IP check, Network wire break down, DI)
	Operation Voltage	DC 12V Max: 13W / PoE Max: 20W
	Dimen./Weight	253mm(Φ) x 366.7mm(H) / 10.5kgs
	Operation Temp.	-20℃ ~ +60℃ or -40℃ ~ +50℃ (built-in heater for option)
Enclosure	Enclosure	316L Stainless steel Housing, NEMA-4X, IP68, IP69


Accessories (Option):



ON-JB01S / Junction Box
SUS316L, G3/4 outlet hole x 2
260 x 160 x 230mm, 3.3kgs



ON-PP01S /Flexible Pipe
SUS316L
1M



ON-WM01S / Wall Mount Bracket
SUS316L
150 x 312 x 305mm, 2.1kgs



ON-PO01S / Pole Mount
SUS316L, Poles 4 to 6" diameter
240 x 163 x 72mm, 1.6kgs



ON-CA01S / Concave Corner Mount Adaptor
SUS316L
305 x 210 x 60mm, 1.1kgs



ON-CA02S / Concave Corner Mount Adaptor
SUS316L
322 x 210 x 179mm, 2.1kgs