




Model No. : **ON-POE29-RX948_ON-POE29-RX948-1SC**

Chipset		IP1717B
Standard		IEEE802.3、IEEE802.3u、IEEE802.3x、IEEE802af、IEEE802.3at
Layer 2 Switching		Backplane Bandwidth: 1.8Gbps
		Packet Forwarding Speed: 12.96Mbps
		All Ports Speed Forwarding
Port		<p>Model : ON-POE29-RX948</p> <p>8 * 10/100M Ethernet Port (PoE) + 1 * 10/100M UPLINK port</p> <p>Model : ON-POE29-RX948-1SC</p> <p>8 * 10/100M Ethernet Port (PoE)+ 1 * SC</p>
Power	Voltage	8 * PoE port with 802.3af standard
	Input Voltage	AC 100-220V / DC 48V
Power Consumption		4W (standby situation)
Maximum Output Power		13.5W (single port)
The Size of the MAC Address Table		4K
Features		IEEE 802.3x traffic control under Full-Duplex mode
		Storm control based on the data transmission speed of the port
		PPS-based storm control
VLAN		Turn on the VLAN button in the panel, 8 PoE ports will be isolated from each other but available to communicate with the UPLINK port. When VLAN is off, 9 ports can communicate with each other.
Operating Condition	Operating Temperature	-20 ~ 60°C
	Storage Temperature	-50 ~ 80°C
	Humidity	≤10 ~ 90% (non-condensed)

Product Size & Weight:

300 * 220 * 30MM

1.2kg

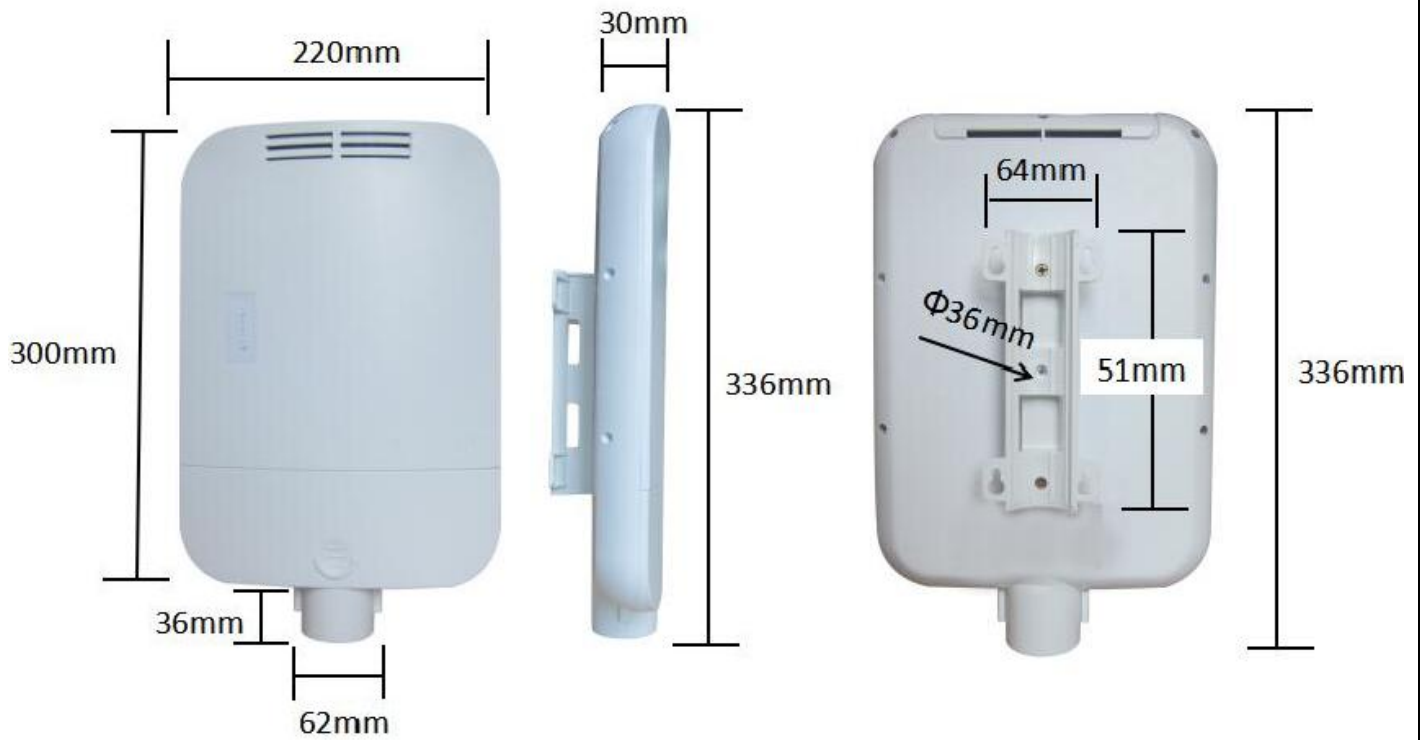

Package List:

1 * PoE29-IC948

1 * Ring

1 * Manual



Package Size & Weight:

429 * 268 * 94MM

1.4kg

Package Size & Weight:

430 * 295 * 245MM

14kg

QTY: 10PCS

