

MODEL: ON-LED32-QL

32" Professional LED Monitor








- **1.** HD: 1920*1080 HD resolution, 16:9 golden ratio, fine picture quality, more comfortable vision, immersive
- 2. High definition: Delicate and lifelike, transfer true color, show off my true colors
- **3.** Bright: Image quality is improved for better presentation
- **4.** Thin fashion appearance, exquisite workmanship, body thin about 8 mm, black and white two let customers have more choices
- **5.** Excellent wide view technology allows you to enjoy hd wonderful pictures and feel the beauty of true colors no matter from any Angle
- **6.** 8bit image chip processing technology, high pixel line by line scanning, fine and realistic picture quality
- **7.** Support intelligent 3D noise reduction, residual shadow elimination function, dynamic brightness, contrast color optimization technology
- **8.** The application of the world's leading liquid crystal drive scheme, accurate restoration of front-end signal, strong sense of reality
- **9.** Liquid crystal has small volume, low energy consumption, zero radiation, image stability, no impact on the eye, natural health
- **10.** 4ms fast response, avoid the image in high-speed operation of the trailing phenomenon
- **11.** Using nanotechnology, the picture is more three-dimensional and transparent
- **12.** No flash screen + low blue light shielding harmful blue light band, reduce reflection interference, reduce eye damage
- 13. Using quantum dot technology, the picture color is more vivid and fuller

Dimension

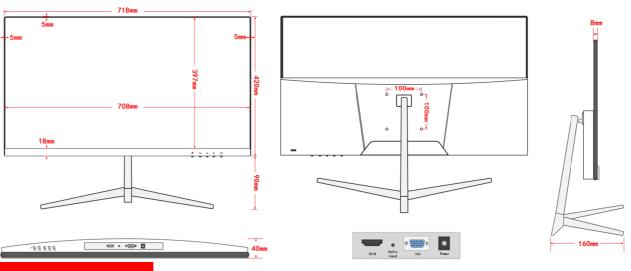

specification

The product type: Professional monitor

Product model: ON-LED32-QL

Screen inch: 32"
Screen type: LED
Aspect ratio: 16:9
Bright degree: 200nit
Contrast: 3000:1
Response time: 4 ms
Visual area: 708×397 mm
Visual Angle: 178° /178°
Display colour: 16.7M

Distinguishability: 1920*1080

Control method: panel

Input port: HDMI, VGA, audio input

Audio input: stereo speake Power supply: 12V/3A

Power: 40W

Shell material: Flame retardant metal

External dimension: 718*420*40 Bracket height is not included (Bracket height

90mm)

Product carton weight: 1.5kg

Way to install: Base, wall hanging (100*100mm)

Product weight: 4.8kg

Packing box size: 793*515*124(mm)

Rough weight: 6.4kg

Out packing size: 4 PCS/CARTON

weight: 27.3KG

Operating ambient temperature: Most suitable for 20°

Working environment wet: 10%-90%RH

Storage temperature: -10° -- 60°