




Model NO.: [ON-N6108G-P8-V2](#)

H.265 8CH 4K/8MP POE NVR with 1pcs SATA

APP: Superlive Plus

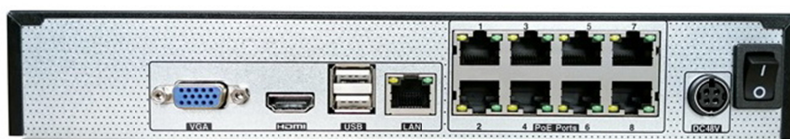

Key Features:

- Support 8 CHs 8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P IP input
- Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback: 8CHs simultaneous playback
- Search : time slice, time, event (manual, sensor, motion), tag search
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol and CMS supported
- Remote control via IE or CMS : preview, playback, backup, PTZ and configuration 4 / 8 PoE network ports, support IPC direct connection to NVR; support PoE power supply
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with iOS and Andriod OS
- APP: Superlive Plus

Specifications:

Model		ON-N6108G-P8-V2
System	Compression	Standard H.265
	Main Processing Chip	ARM Cortex A7
	OS	Embedded Linux
Video	Network Access Bandwidth	50Mbps
	Input Resolution	8MP、5MP、4MP、3MP、1080P、960P、720P real time
	Network Access	8 CH IPC input
	Output	HDMI×1: 3840×2160/1920×1080/1280×1024
		VGA×1: 1920×1080/1280×1024
Audio	Input	8 CH IPC audio input
	2-way Audio	RCA×1
	Local Output	RCA×1
Record	Resolution	8MP、5MP、4MP、3MP、1080P、960P、720P
	Frame Rate	25fps/30fps(PAL/NTSC)
	Bite Stream	32Kbps-10Mbps
	Image Quality	5 Level
Playback	Simultaneous Playback	Max 8 CH
Network	Interface	RJ45 10/100Mbps × 1; RJ45×8 (PoE Port)
	Network Protocol	TCP/IP、PPPoE、DHCP、DNS、DDNS、UPnP、NTP、SMTP、ONVIF、GB28181
Storage	HDD	SATA×1
	Max Capacity for 1 single HDD	8T
Backup	USB Backup	Yes
	eSata Backup	No

Interface	Alarm In	No
	Alarm Output	No
	Communication	No
	Remote	Optional
	USB	USB2.0×2(one in the front panel and the other in the rear panel)
Others	Case	1U
	Dimensions(mm)	300×248×52(W×D×H)
	Power Supply	DC48V
	Consumption	≤ 5W (without HDD)
	Work Environment	-10 ~ 50 ℃,10% ~ 90% humidity