




Model: ON-PTZ608IRC-5X-BTJ

8MP H.265 Mini 5X Zoom POE PTZ IP Camera

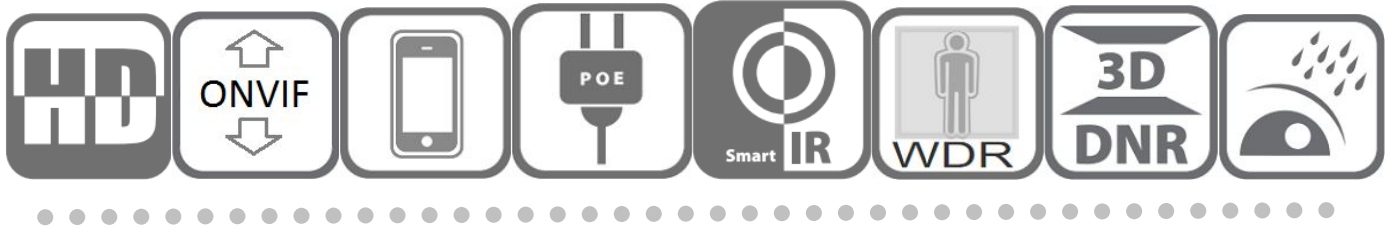

Features:

- 1/2.8" Sony low-light CMOS sensor
- 4K resolution 3840 x 2560 output
- low illumination 0.01Lux
- 5x optical zoom lens
- Day/Night, AWB/MWB,BLC, HLC, 2D/3D-DNR,Shutter, IR-CUT
- D-WDR, Mirror, rotate, Defogging
- Multiply Style OSD Overlay,Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE,Firefox 32bit ESR, PC Client, Mobile APP remote access

- Lightning protection 4000V
- Strong water-proof housing IP66
- 8 pcs Array IR Led, IR distance 80-100 meters

Technical Specifications:

Model	ON-PTZ608IRC-5X-BTJ
Camera	
Image Sensor	1/2.8" Sony IMX415 CMOS
Effective Pixels	4 megapixels
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror
Encode	
Video Standard	H.265/H.264
Video Resolution	MainStream:20fps@8MP(3840x2160),30fps@6MP(3072x2048)/5MP(2592x1944)/4MP/3MP/1080P/720P,etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc.
Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
OSD Overlay	Title and Time overlay
IR Led	
IR Led	8pcs array IR Led
IR Distance	50-80 M
Lens	
Focal length	2.7.7-13.5mm
Zoom	5x optical zoom
Optional Function	
High power PoE, audio , SD slot, speaker	

PTZ	
Pan/Tilt Range	Pan: 0° ~ 355°; Tilt: 0° ~ 92°
Preset Point	255
Control Speed	Pan: 0.5° ~20° /s; Tilt: 0.5° ~20° /s
A-B Scanning	Support
Auto Cruising	Support
Power on Action	Preset/Scan/Cruise
Power-off Recovery	Support
Network Services	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox (32bit esr), etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, PoE 48V in
Power Supply	12 VDC ± 10% 2A
Power Consumption	< 20 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH
Size	22.6*19.0*13.3 cm
Weight	1 kg