



## Multi-functions CCTV Tester

### ON-TM1910S | 8K HD camera test

#### 4 inch ALL IN ONE CCTV Tester


- 4 inch IPS touch screen, 960 x 640 resolution
- 8K H.265 video display via mainstream
- 8MP CVI/ TVI/ AHD camera test
- Auto HD, auto recognize HD coax camera type and resolution
- Analog camera test, PAL/NTSC auto adapt
- DC12V 3A, 48V PoE 25.5W power output
- Rapid ONVIF, create the test report and modify IP address
- High brightness LED light
- UTP cable test, detect the near-end, mid-end and far-end fault point of the RJ45 cable plug



#### Application

The 4 inch IPS touch screen IP camera tester is designed for maintenance and installation of IP analog, HD coaxial cameras as well as other security equipment. The 800\*480 resolution enables it to display network HD cameras and analog cameras in high resolution. The unit supports many ONVIF PTZ and analog PTZ control, and cable test functions. CCTV installers often need to carry a variety of testing tools to complete their work. If take the all in one camera tester, making working conditions safer and increasing productivity.

- CCTV system installation and maintenance
- Network cabling project installation and maintenance
- Dome camera, IP TVI CVI AHD 4K H.265 camera testing
- Video transmission channel testing
- PTZ controller

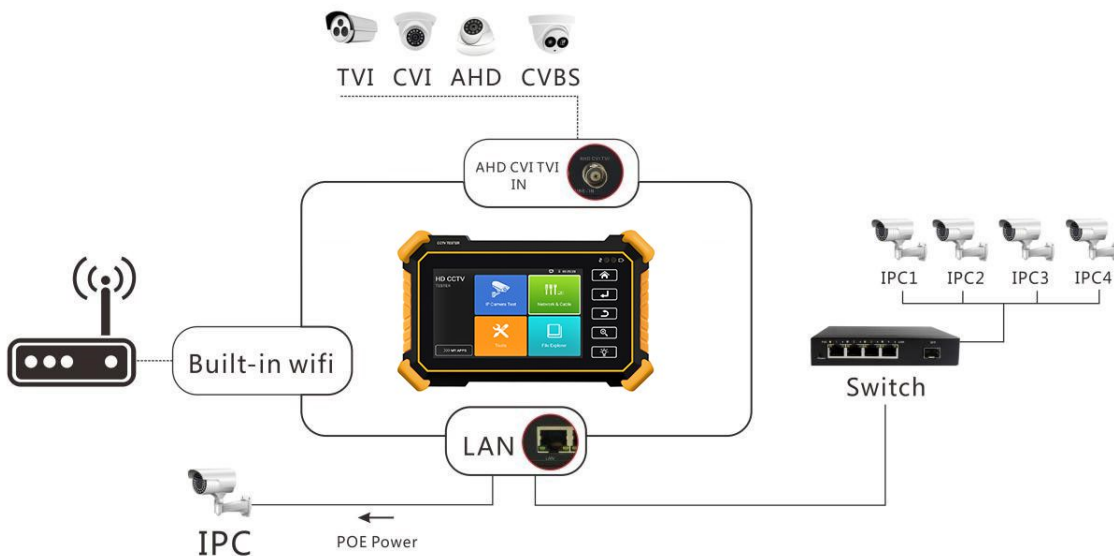

## Features

### Camera test:

- 4 inch IPS touch screen, 960\*640 resolution
- 8K H.265 video display via mainstream
- Analog camera test, PAL/NTSC auto adapt
- 8MP TVI test, 3840 x 2160P 12.5/15 FPS, 4xzoom, video record & playback, coaxial PTZ control & call OSD menu
- 8MP AHD test, 3840 x 2160P 15 FPS, 4xzoom, video record & playback, coaxial PTZ & call OSD menu
- 8MP CVI test, 3840 x 2160P 12.5/15FPS, 4xzoom, video record & playback, coaxial PTZ & call OSD menu
- Auto HD app, auto recognize HD coax camera type and resolution, support snapshot, video record & playback, coaxial PTZ & call OSD menu.
- Rapid ONVIF, Auto log in and display image, create testing report
- IPC test pro, auto scan all network segments IP, auto open PoE power and display the power. Input username and password, can scan camera image, can batch activate HIKVISION and Dahua cameras. Jump to ONVIF interface and test tools.
- AXIS, Hikvision camera test, enter ONVIF app, input username and password to test
- HIKVISION test tool, support batch activate HIKVISION cameras and modify IP address, modify password etc. Self-defined modify channel name, can quickly change H.264 and H.265 video, open wide dynamic mode. Factory restore, etc. **Support reset password and set video occlusion alarm of HIKVISION cameras.**
- Dahua test tool, support batch activate DAHUA cameras and modify IP address, user name and password. Self-defined modify channel name.
- IP and analog display image at the same time
- IPC TEST (Non-ONVIF test), HIK test tool (Hikvision camera), DH test tool (Dahua camera)
- DC12V/3A power output, camera can be powered from DC 12 Voltage.
- Rapid video, just by one key to detect all network cameras and auto display
- Built in Wi-Fi, display image from the wireless camera, create WIFI hotspot

### Cable test:

- Improvement cable tester, UTP cable, telephone cable etc order and connectivity test, can save testing report, if special number, need customized. Can detect the near-end, mid-end and far-end fault point of the RJ45 cable plug

### Other Functions:

- Network tool: Ping, IP scan, Port Flash, DHCP server, Trace Route
- TesterPlay: Tester, android version mobile phone and PC display at the same time
- Traffic monitoring, display network port or WIFI connection real-time upload and download speeds and other network parameters
- Customers self-update software, you can install apps with android version
- Media player, 4K video files and MKV/MP4 media files play
- SD card slot, support up to 32G, to save video, picture and other files
- Display its genuine resolution of the IP camera images
- Audio in, support record and save the audio/LED lamp, calculators, music players and other application tools
- 7.4 V / 2600mAh Lithium Ion Battery, after 3-4 hours charging, working time lasts 9 hours

## Specification

LCD	Item series	IPC-1910 Plus
	Display	New 4 inch IPS touch screen, 960*640 resolution
Video Mode	CVBS	1 channel BNC input, NTSC/PAL (Auto adapt)
		PTZ control, RS485 control, Baud 600-115200bps, compatible with more than 30 protocols such as PELCO-D/P, Samsung, Panasonic etc
	IP camera test	IP Discovery/Quick ONVIF/IPC test /RTSP play /Client APK

Cable test	8K H.265/4K H.264	Rapid Video	Auto view the video, create testing report
		HIKVISION test tool	Support batch activate HIKVISION cameras and modify IP address, modify password etc. Self-defined modify channel name, can quickly change H.264 and H.265 video, open wide dynamic mode. Factory restore, etc. <b>Support reset password and set video occlusion alarm of HIKVISION cameras.</b>
		DAHUA test tool	Support batch activate DAHUA cameras and modify IP address, username and password. Self-defined modify channel name.
	HD Coaxial test *	8MP TVI camera test, 3840 x 2160P 12.5/15 FPS, UTC control/ call OSD menu	
		8MP CVI camera test, 3840 x 2160P 12.5/15 FPS, UTC control / call OSD menu	
		8MP AHD test, 3840 x 2160P 15FPS, UTC control / call OSD menu	
		Auto HD app, auto recognize HD coax camera type and resolution, support snapshot, video record& playback, coaxial PTZ & call OSD menu	
	Zoom Image	4x zoom, to enlarge image, Screen snapshot, record, save, view and record and play back	
	12V/3A power	Output DC12V/3A power out, supply temporarily power for the camera	
	PoE power output	48V PoE power output, max power 25.5W	
UTP cable test	Test UTP cable connection status and display on the screen. Can detect the near-end, mid-end and far-end fault point of the RJ45 cable plug.		
Tester Play	Screen projection: Tester, mobile phone and PC display at the same time (For android version mobile phone)		
Network test	Trace route, Link monitor, DHCP server, port flashing, Ping test		
Wi-Fi	Built in WIFI, speeds 150M, display wireless camera image		
Audio test	1 channel audio signal input, test whether sound normal.		
Power management	Display DC 12V input & output voltage and power in real time		
Data monitor	Captures and analyzes the command data from controlling device, also can send hexadecimal		
External power supply	DC 12V 1A		
Battery	Built-in Lithium ion battery 7.4 V / 2600mAh		
Rechargeable	After charging 3-4 hours, normal working time 9 hours		
Operation setting	OSD menu, select your desired language: English, Portuguese, Korean, Russian, Italian, French, Polish, Spanish, Japanese, Turkish, Deutsch, Serbian, Czech, Vietnamese etc		
Auto off	1-30 (mins)		
Working Temperature	-10℃----+50℃		
Working Humidity	30%-90%		
Dimension/Weight	160mm x 100mm x 45mm / 0.36kg		

The data above is only for reference and any change of them will not be informed in advance. For more detailed technical inquiries, please feel free to contact us

### Packing kits

- 1) Tester
- 2) Network cable tester
- 3) Adaptor DC12V 1A
- 4) lithium ion battery (7.4 V / 2600mAh)
- 5) Tool bag / DC Power cable/BNC cable/ RS485 cable/ Audio cable/ Safety cord
- 6) Wrist belt