




**MODEL : ON-X6104-V3 4CH 4K 5 IN 1 DVR**

**APP: Superlive Plus**

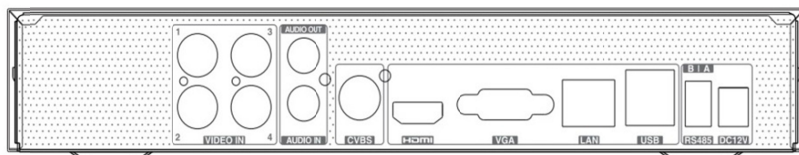

## Features:

4CH TVI / AHD/CVI 8MP/5MP/4MP/3MP/1080P/720P/WD1 IP video input↵

Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate ↵

Intuitive and user-friendly Graphics User Interface ( GUI ), window style operation by mouse ↵

Multi-mode recording: manual / timer / motion / smart event ↵

Playback : 4CH simultaneously playback ↵

Search: time slice, time, event, tag and smart search ↵

Express and flexible backup via USB, network and so on ↵

Pentaplex: preview, record, playback, backup and remote access ↵

DHCP, DDNS, PPPoE network protocol ↵

Remote control via IE or CMS : preview, playback, backup, PTZ and configuration ↵

Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device ↵

Multi-user online simultaneously ↵

Authorization management, log review and device status review ↵

HDMI 4K output, true high resolution display ↵

Support PTZ preset and auto cruise, up to 255 presets and 8 cruises ↵

Support NAT function and QRCode scanning by mobile phones ↵

Powerful mobile surveillance by smart phones with iOS and Andriod OS ↵

APP: Superlive Plus↵

## Specification:

Model		ON-X6104-V3
System	OS	Embedded Linux
Video	Input	BNC 4 BNC interface (1.0Vp-p; 75Ω) TVI/AHD/CVI : 4K@15fps, 5MP@20fps, 4MP/3MP/1080P/720P/WD1@30fps (live)
	IP Input	2CH Up to 8MP@20fps, lower than 8MP @30fps
	Output	HDMI × 1 : 3840 × 2160 / 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 BNC × 1 : CVBS ( used as the main or spot output )
	Compression	H.264/H.265
	Multi-screen Display	1/4/6/8/9
Audio	Input	RCA 1
	Output	RCA 1
	Two-way audio	Take up channel one audio input, G.711(U/A)
Record	Resolution	4K/4K Lite/5MP/5MP Lite/4MP/4MP Lite / 3MP/1080P/720P/WD1/D1
	Frame Rate	Analog Channel: 4K@6fps/7fps (PAL/NTSC) (4 CH DVR: only CH 1 supports; 8CH DVR: all channels support) 4K Lite@12fps/15fps (PAL/NTSC) 5MP@12fps (PAL / NTSC) 5MP Lite@20fps (PAL / NTSC) 4MP/3MP@12fps / 15fps (PAL / NTSC) 4MPLite/1080P/720P/WD1/D1@25fps/ 30fps(PAL / NTSC) IP Channel: 8MP @20fps (PAL / NTSC); lower than 8MP @25fps / 30fps (PAL / NTSC)
	Bit Rate	32Kbps ~ 4Mbps
	Mode	Manual, timed, motion, smart event
Play back	Playback	4CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlight colors to display the camera record in a certain period of time, different colors refer to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	Mode	Manual, motion, exception
	Input	No
	Output	No
	Interface	RJ45 100Mbps 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
	Client Connection	Max. 10 users access

Network		
	Accss/Transfer Bandwidth	16/40Mbps
Mobile Device	OS	iOS, Andriod
Storage	HDD	SATA 1 , up to 10Tb/HDD
Backup	Local Backup	U disk, USB removable HDD
	Network Backup	Yes
Port	RS485	RS485 1 , connect to PTZ or keyboard
	USB	USB 2.0 2 ( i n the rear panel )
	Remote Controller	Optional
Others	Power Supply	DC12V / 1.5A
	Consumption	≤10W( without HDD)
	Dimensions	255mm 222mm 4 2 mm( W D H )
	Work Environment	-10 ~ 50 °C , 10% ~ 90% humidity