



2M Dual Eyes Thermal IP Cube Camera


- Dual Sensor IP camera
- Visible Image for Video 2M pixels Hi-resolution
- Thermal Image & Temperature Indicate (by IVS-NVR)
- Detecting Environment Temperature
- High Temperature Alarm I/O
- Temperature Risk Management
- Motion Detection
- Support 12Vdc & PoE
- White LEDs



Thermal Video	Image Sensor	Uncooled VOx Microbolometer
	Resolution; Pixel Size	80x60, Progressive Scan; 17 μm
	Spectral Range	Longwave infrared, 8 μm to 14 μm
	Angle of View	H: 51°, V: 38°, D: 64°
	Full Frame Rates	9 fps
	Thermal Display	B&W/Color/Reverse
	Temperature Detection (Option)	Center & Max. Temperature (MAX 3M / Tol. ±2°C or ±2%)
	Temperature Alarm (Option)	Temperature Alarm (Option)
	Visible Video	Image Sensor
Video Resolution		2 Megapixel; 1920x1080P@9 fps
Minimum Illumination		Color: 0.1Lux@F1.2, Sense-up: 0.001Lux@F1.2, Light on: 0.0012Lux@F2.0
White Balance		Support
Image Setting		Brightness, Contrast, Saturation, Sharpness, De noise, Grayscale
Lens		f6.0mm
WDR		Support
ICR		N/A
Aperture		Fixed Lens
LED ; Working Distance (Meter)		White LEDs ; 5 Meter, Support Manual or Alarm (On/ Off)
OSD Menu		English, Japanese, Traditional Chinese, Simplified Chinese
General	TV System	PAL/NTSC
	Video Compression	H.264, MPEG4, M-JPG
	Browser	IE 10 or Above
	Ethernet	10/100M Auto Negotiation
	Bit Rate	64 up to 12,000 Kbps
	ONVIF	Support ONVIF(Profile S)
	Protocols	TCP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, PPPoE, ARP, UPnP, RTSP, RTP, SNMP, TRAP, ONVIF, Ethernet (RJ-45 Wired 10/100 Base-TX)
	User	Support 9 Users
	Security	ID / Password Protection
	Alarm Trigger	File Upload via FTP and Email/Notification via Email, HTTP, External Digital Output Activation
	Multicast	Support Multicast Function
	Connector	RJ45, DC Power, Reset Button, SD Slot
	Alarm In / Out	DI / DO
	Power Supply ; Consumption	12Vdc/ PoE; 4W
	Audio	Line In / Line Out 3.5mm
	Temp.; Humidity	-10° C ~ 50° C ; -20° C ~ 60° C
	Dimensions	71.6(W) x 117.5(H) x 35.5(D)mm
	Net Weight	450g



Dimensions

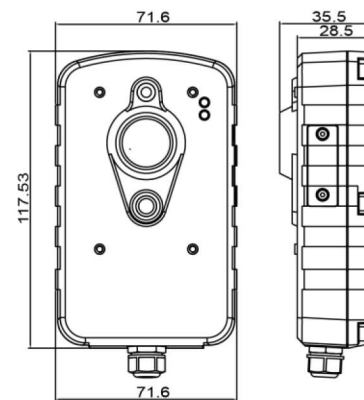

Software IVS-NVR



*Specifications are subject to change without notice. v13_181016